



AIR CONDITIONING



REFRIGERATION



HEATING



mk4

CONDENSATE REMOVAL PUMP



The MK4 peristaltic is operated using two water sensors. The lower sensor comes into contact with water, the heat conductivity from that sensor provides a temperature difference between the second – energising the pump.



6.5L/h max. flow





12m max. head (flow rate 6.5L/h)

KEY FEATURES


- Water sensor operated
- Remote install possible
- Pumps contaminated water
- Can run dry

SUITABILITY

- Up to 8.5kW / 29,000Btu/h
- High Wall Split Systems; Ducted units; Floor standing & Chassis units



| MK4 SPECIFICATIONS | |
|--------------------|--------------------------|
| Max. flow | 6.5L/h @ 12m head |
| Max. head | 12m |
| Max. suction lift | 3m |
| Sound level@1m | 47dB(A) |
| Power supply | 230V AC 50-60Hz 0.2A |
| Rated Class | Continuously I appliance |
| Max. unit output | 8.5kW / 29,000Btu/h |
| Max. water temp | 40°C / 104°F |
| Inlet/outlet | 6mm ID |
| IP Protection | IPX1 |
| Safety switch | n/a |
| Thermal protection | ✓ |
| Fully potted | n/a |
| Self priming | ✓ |

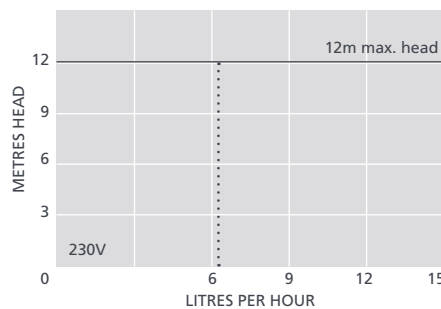

| SUGGESTED XTRA ACCESSORIES | |
|----------------------------|----------|
| Description | Part No. |
| Peri Spare Tube Kit | FP1282 |
| 1 Amp Fuse | FP2620 |
| Tube To Soil Stack Adaptor | FP2038 |

Xtra For more installation accessories take a look at our Aspen Xtra range

| MK4 OPTIONS | |
|-------------|--------|
| MK4 | FP2080 |

| IN THE BOX |
|--|
| MK4 pump • 2m Plug & play power cable • Wall mounted bracket • Fixing kit • Install manual |

- 📖 Download manual at aspenpumps.com
- ▶ View install video at aspenpumps.com



aspenpumps.com

+44 (0)1323 848842

sales@aspenpumps.com

Making life easier for the installer